
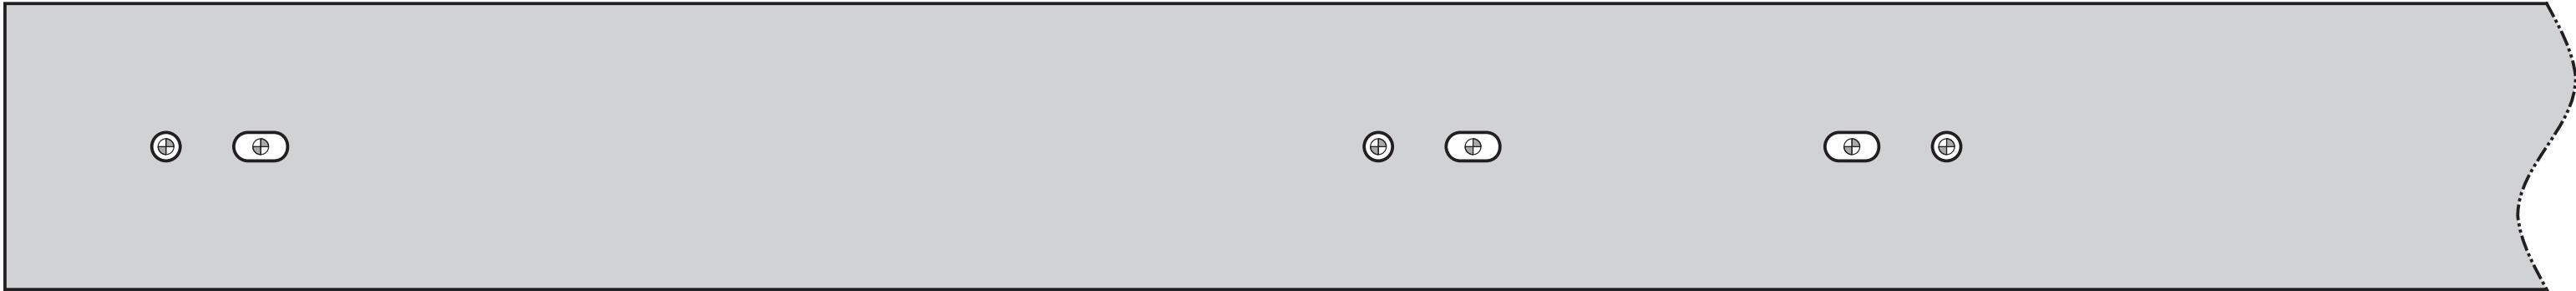
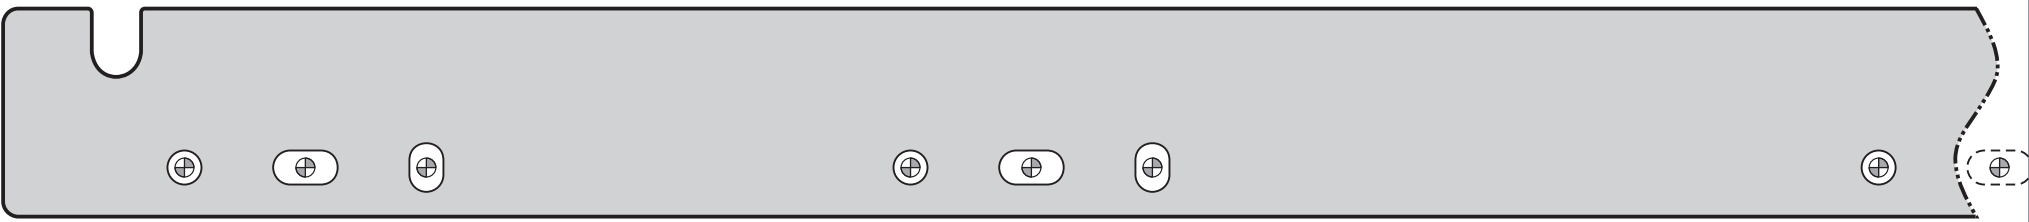


Dotted line align with inside bottom of cabinet


Front door center  
T=Thickness of panel




Fitting instructions

**IMPORTANT** - The unit has a maximum loading limit of 45kg including door.  
Bin to suit 600mm wide cabinet using 16-19mm thick carcass material.  
All fixings supplied must be used for installation.


- Parts**
- A** x12 4 x 16mm screw
  - B** x8 4 x 14mm screw
  - C** x4 Screw (M4 x 8mm)
  - D** Lid bracket LH x1
  - E** Lid bracket RH x1
  - F** Runner LH x1
  - G** Runner RH x1

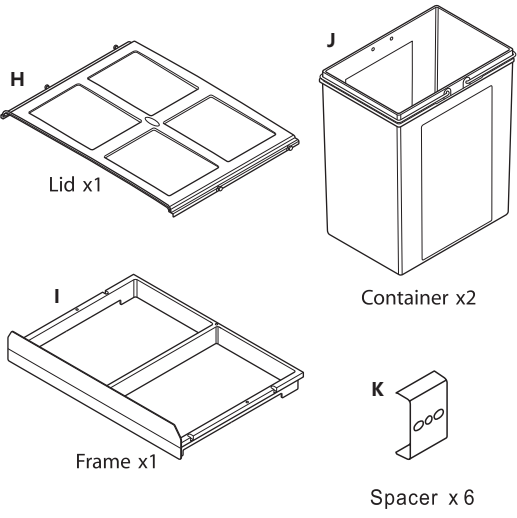


Tools required

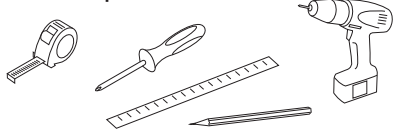

Dimensions – maximum

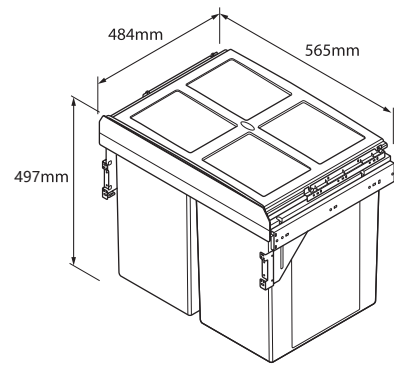


**1** Mark screw positions for lid brackets and runners on both cabinet sides.

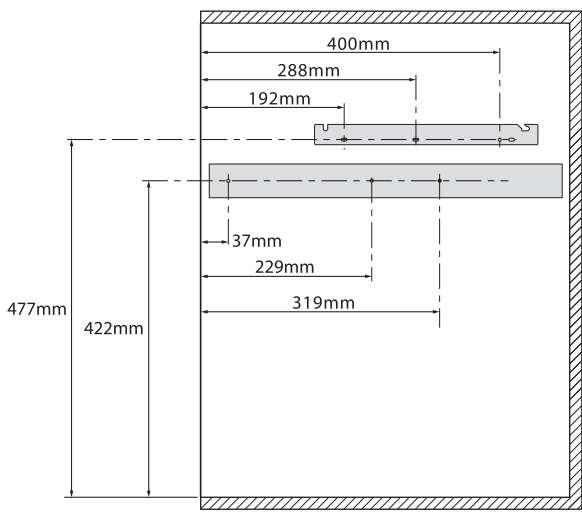


- 1.** Spacer will be used if there is gap between board and slide.  
**2.** Please ensure that all the above fittings are present before installation begins.


**2** Lift the locking levers and remove the front part of each runner.  
Ensure shoulder of bracket faces outwards.

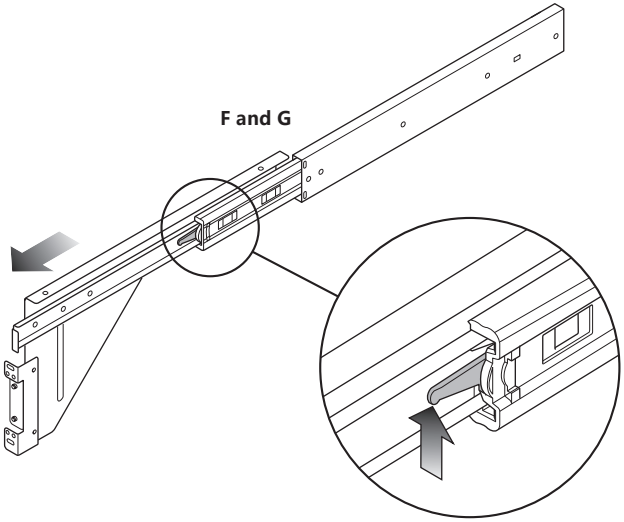

**3** Fit the lid brackets and runners to cabinet sides using screws **A**.

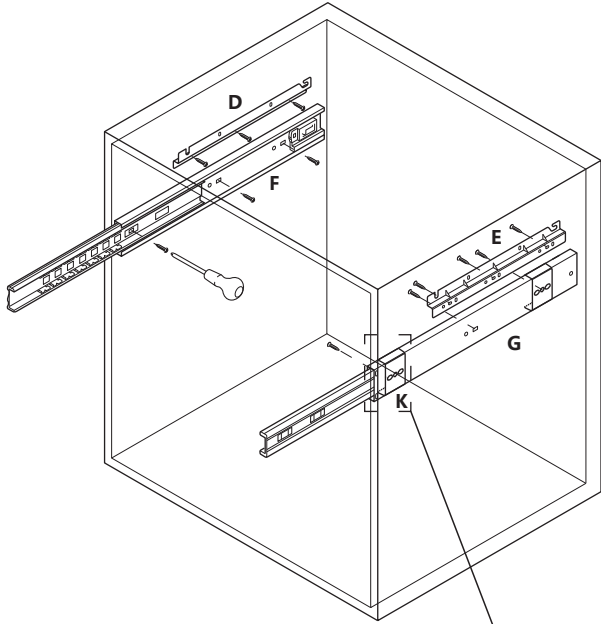


**4** Fit the door brackets to the door.

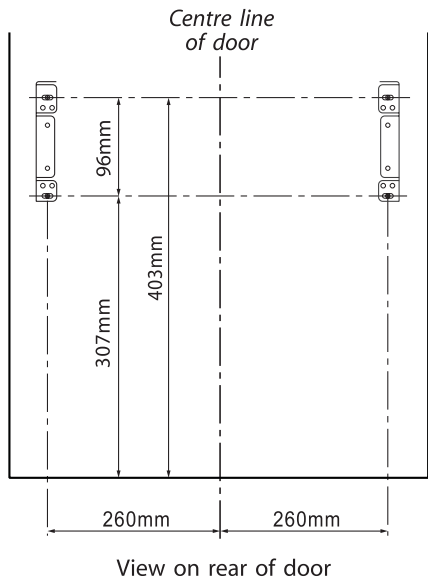


Calculate centre line of door and use above measurements to mark door bracket screw positions.

**IMPORTANT:**  
When fitting the brackets to the door careful consideration should be taken to ensure fixing screws do not protrude through the fascia.

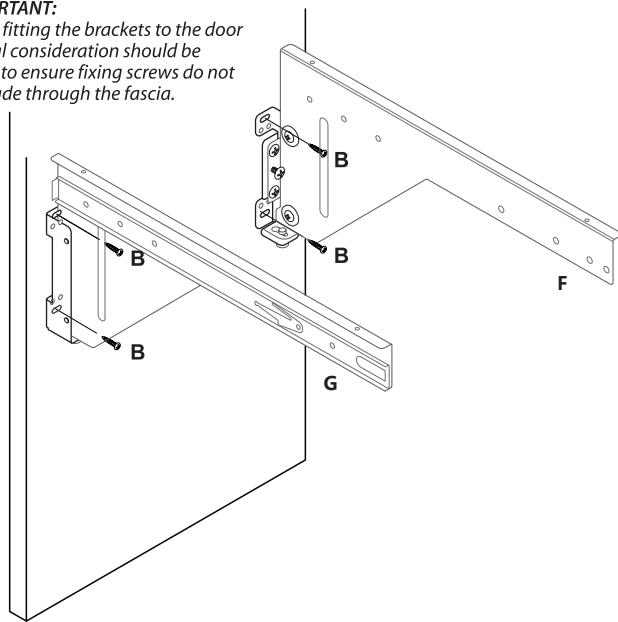

Fit door brackets to door using screws **B**

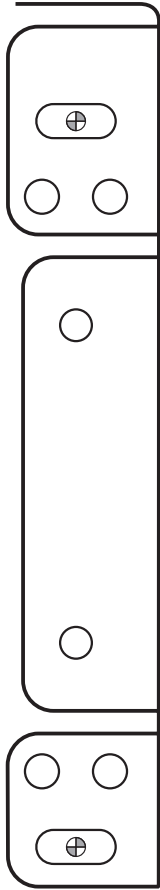

Align with cabinet side panel front

Front door center  
T=Thickness of panel




Align with inside bottom of cabinet side panel

Front door center  
T=Thickness of panel




Align with inside bottom of cabinet side panel


Front door center  
T=Thickness of panel




Dotted line align with inside bottom of cabinet

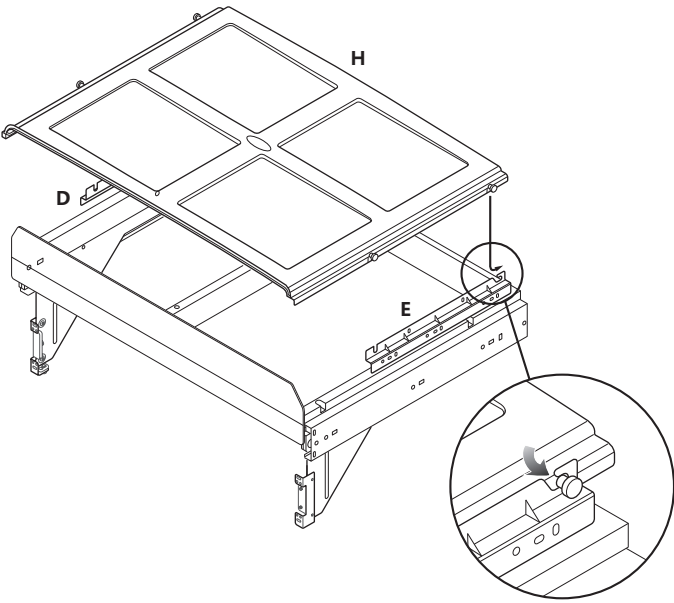


7 Fit the lid to the lid brackets.

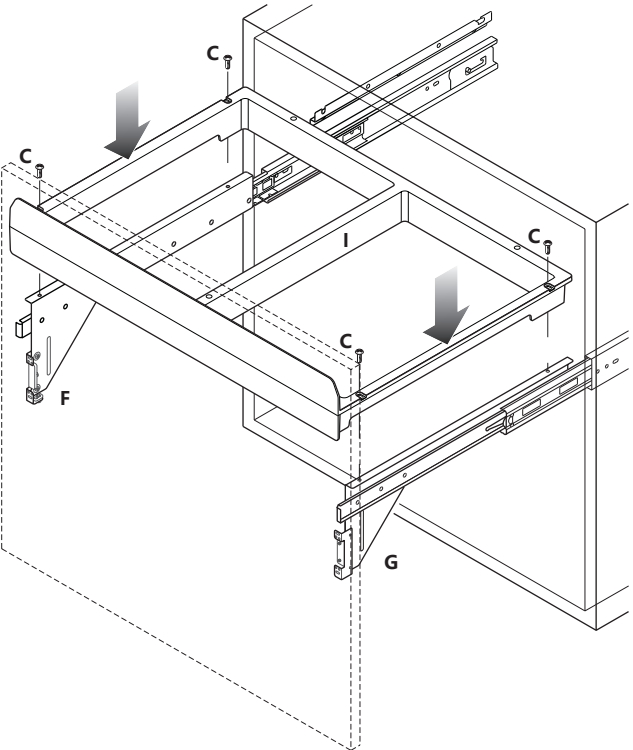


6 Fit the frame to the runners using screws C

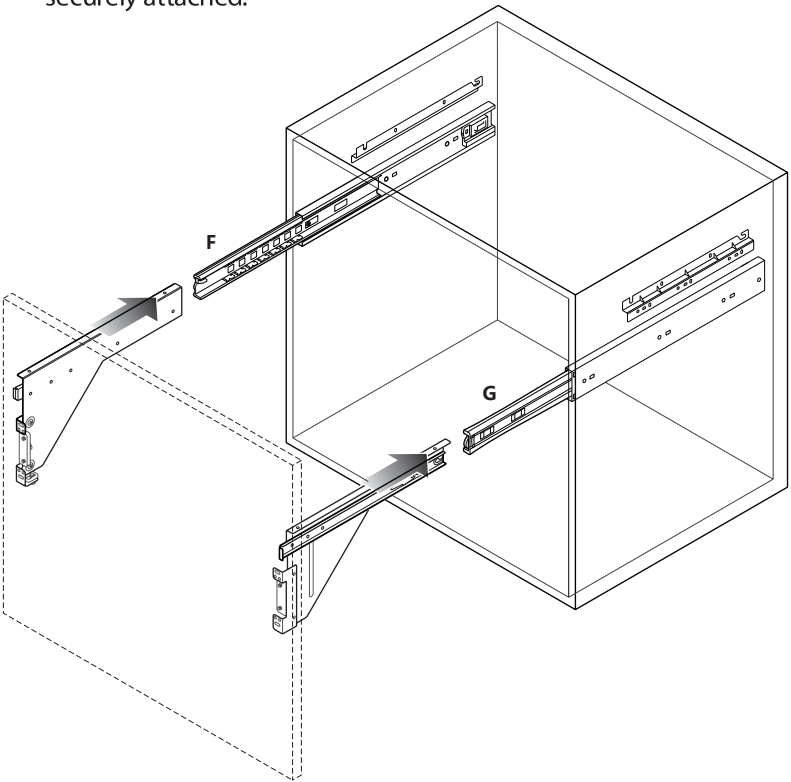

5 Assemble each runner until the locking levers are securely attached.




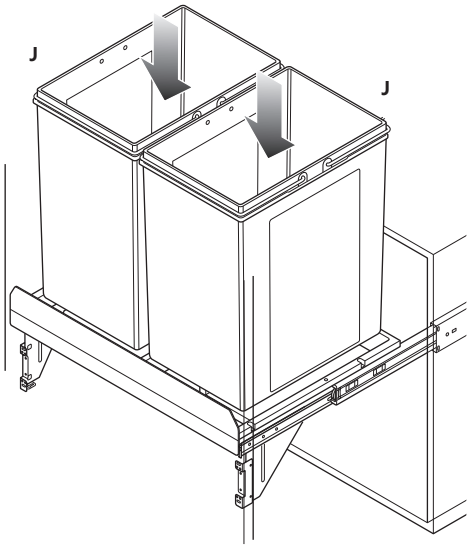


9 Fit the containers.



**IMPORTANT** - The unit has a maximum loading limit of 45kg including door.

8 Align the door to the cabinet using the adjustment screws.

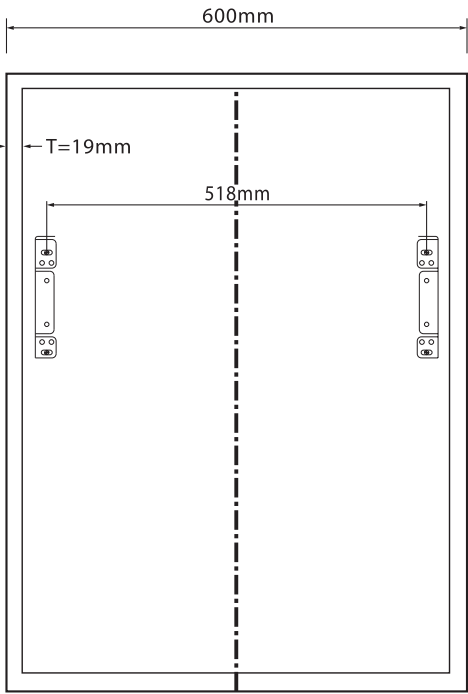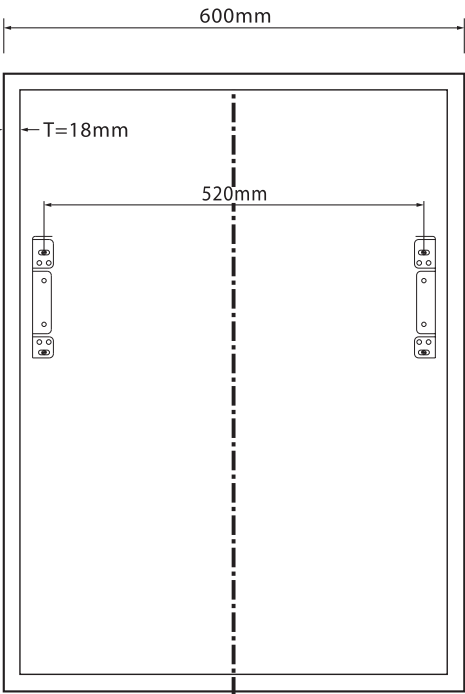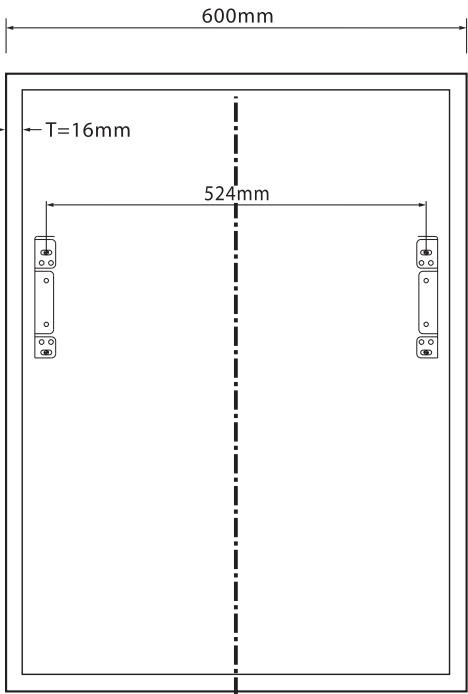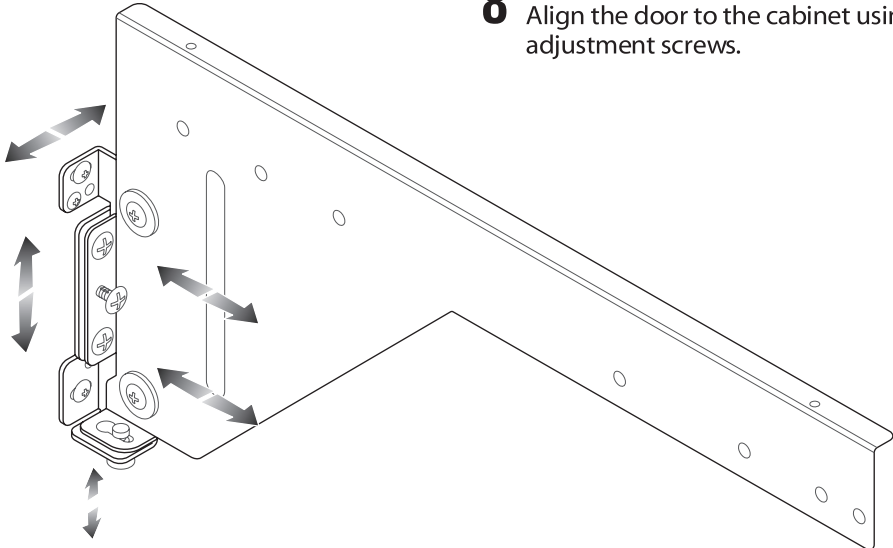

10 Drilling position for front door

